OUTDOOR PROJECTORS

PERISKOP ROUND 2026



i-LèD



PERISKOP ROUND

LIKE A SIGN THAT GUIDES THE LIGHT

Periskop Round was created to define light in outdoor spaces with precision, balance and design freedom.
A collection of projectors that interprets the power of technology through an essential gesture, where form and function merge in perfect harmony.
Every detail is designed to ensure control and flexibility: the distinctive joint allows extreme orientations, offering designers an unprecedented level of aiming precision. Light thus becomes a language of architectural narration, capable of enhancing surfaces, volumes and perspectives with the same coherence that allows Periskop Round to blend seamlessly into the landscape. A complete collection with scalable outputs and a wide range of optical distributions, from hyper spot to elliptical beams, designed to meet every application need, from façade and architectural lighting to landscape and urban contexts. With a dedicated system of accessories, Periskop Round becomes a true tool supporting the project, offering lighting designers maximum creative freedom.




MOVEMENT IN THE LIGHT.















PERISKOP ROUND

ONE COLLECTION. INFINITE INSTALLATION POSSIBILITIES

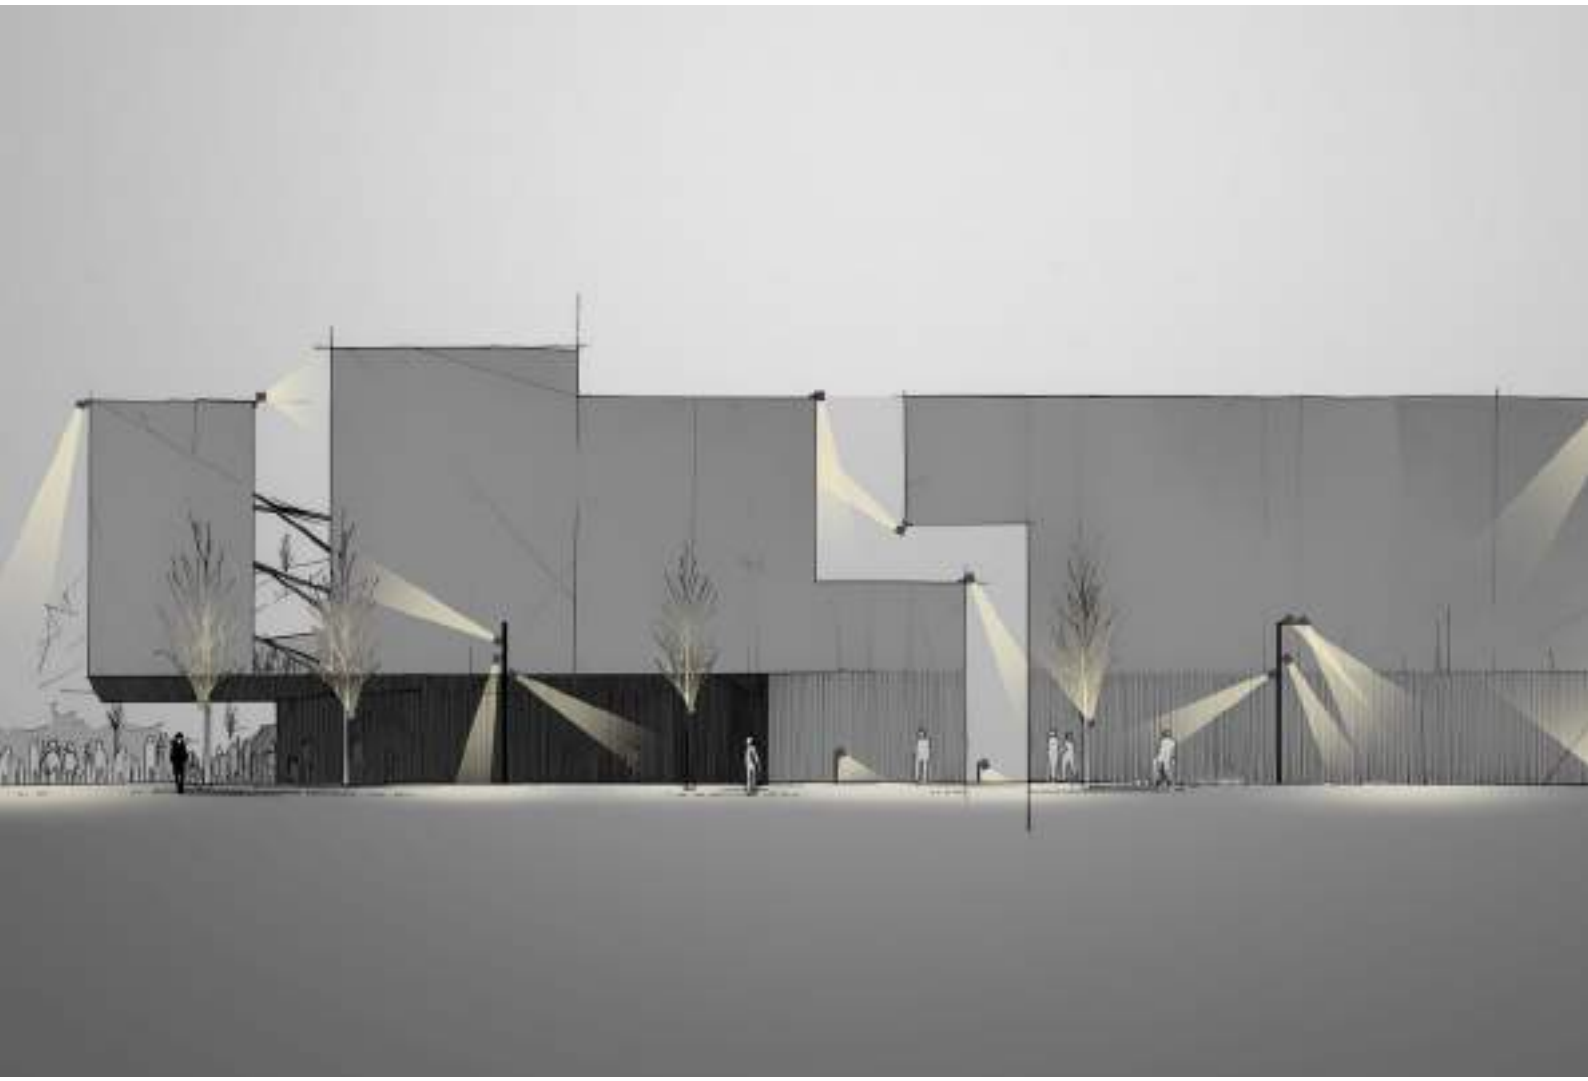


Periskop Round luminaires are designed to ensure maximum installation versatility, adapting seamlessly to any architectural or landscape context. They allow for wall, floor, ceiling, pole, bracket, or tree-mounted installations, up to the tige versions designed to offset the optical unit when the project requires a more advanced positioning. The adjustable joint allows free and precise orientation of the luminaire head, with wide rotation and tilt angles to direct the light exactly where it is needed.

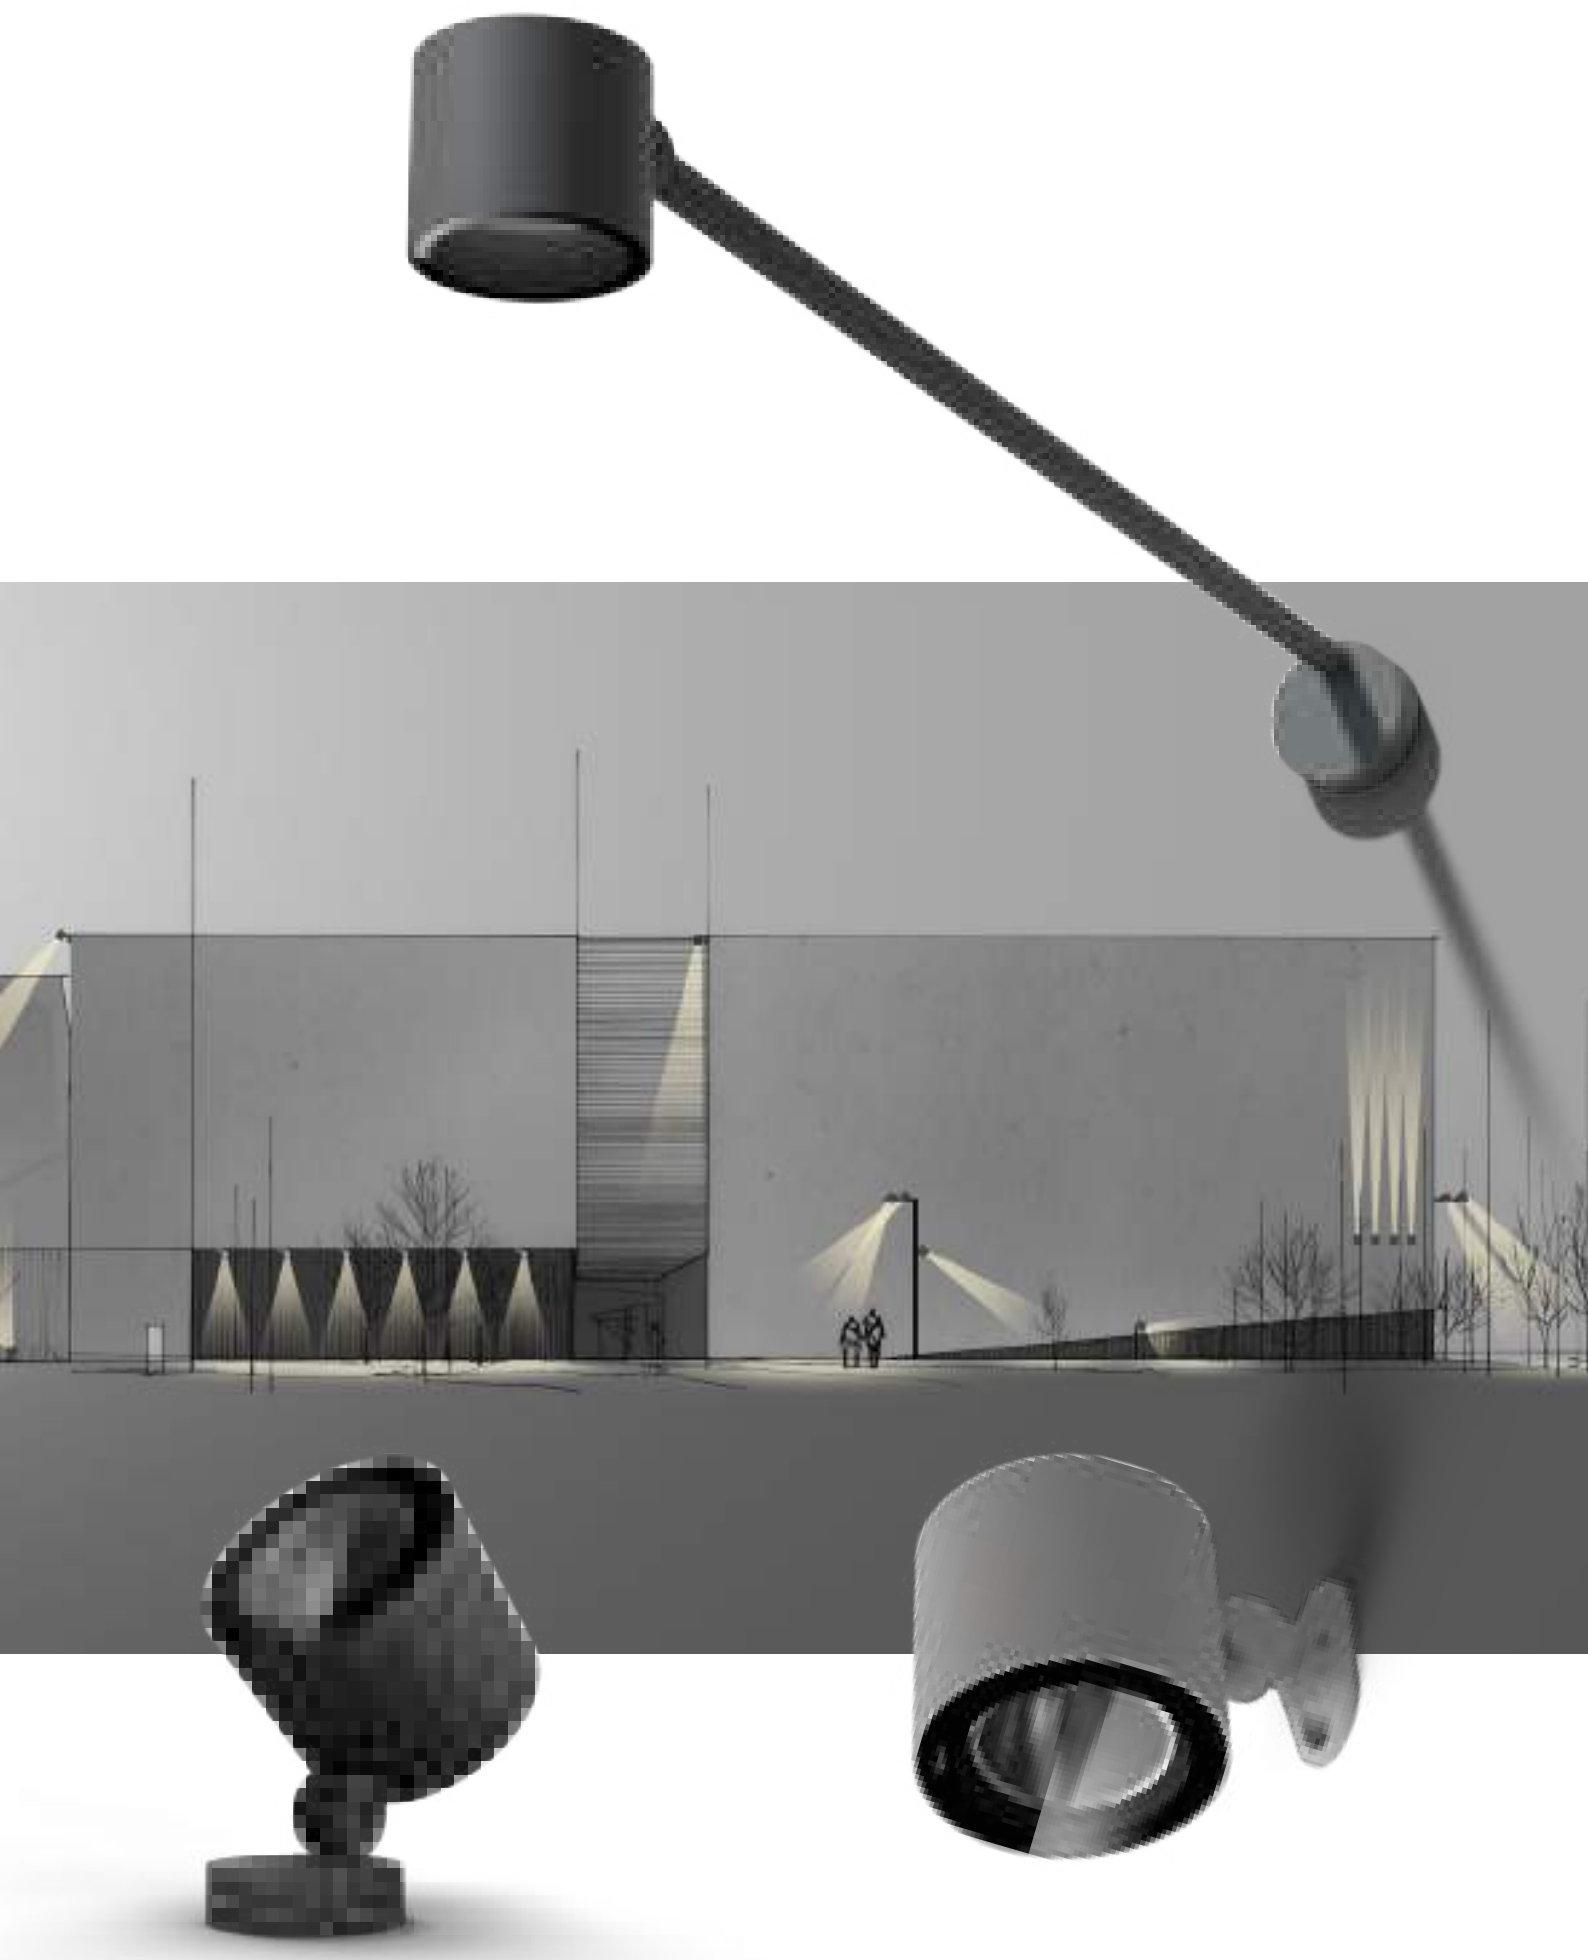


LIGHT UNDER CONTROL

Periskop Round puts light at the service of design. Each optical system is developed with exceptional photometric precision to ensure high performance and adaptability in any architectural or landscape context. The collection offers a wide optical range with different beam angles, engineered to provide accurate beam control and optimal light management across all applications. Versions equipped with a honeycomb louvre minimize direct glare and enhance visual comfort, ensuring a uniform and well-controlled light distribution.

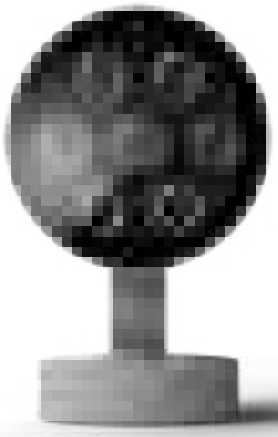

Optic
Hyper Spot

Available for Periskop Round:
Ø80 (1 Led)
Ø115 (3 Leds)
Ø150 (7 Leds)

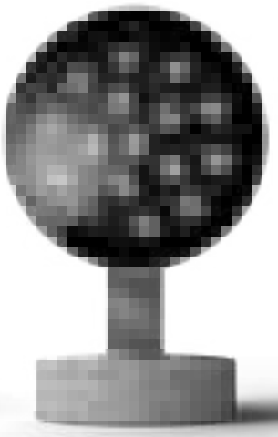

Optic
Ultra Spot

Available for Periskop Round:
Ø80 (4 Leds)
Ø115 (9 Leds)
Ø150 (16 Leds)
Ø175 (20 Leds)



Optic
Spot-Flood
Medium Flood
Medium Wide Flood
Wide Flood-Elliptic

Available for Periskop Round:
Ø80
Ø115
Ø150
Ø175



Optic
Spot-Flood
Medium Flood
Medium Wide Flood
Wide Flood


Available for Periskop Round:
Ø80
Ø115
Ø150
Ø175



Optic
Narrow Spot-Spot
Flood-Medium Flood
Medium Wide Flood
Wide Flood

Available for Periskop Round:
Ø80 RGBW
Ø115 RGBW
Ø150 RGBW
Ø175 RGBW


PERISKOP_R IN BRIEF



RM R RBS

Ø80 mm
Periskop80_


Available for:
R | Round base
RM | Modular base
RBS | Base + Extension
Power:
from 2,5W AC to 11W AC
Lumens delivered:
from 109 to 1061



RM R RBS

Ø115 mm
Periskop115_

Available for:
R | Round base
RM | Modular base
RBS | Base + Extension
Power:
from 8,5W AC to 21W AC
Lumens delivered:
from 257 to 2215




RM R

Ø150 mm
Periskop150_

Available for:
R | Round base
RM | Modular base

Power:
from 17W AC to 37,5W AC
Lumens delivered:
from 547 to 3446



RM R

Ø175 mm
Periskop175_

Available for:
R | Round base
RM | Modular base

Power:
from 46W AC to 49W AC
Lumens delivered:
from 1792 to 6203

OPTIC RANGE



HS (1°÷ 3°)
Hyper Spot

US (4°÷ 6°)
Ultra Spot

NS (7°÷ 9°)
Narrow Spot

SP (10°÷ 19°)
Spot


FL (20°÷ 29°)
Flood

ML (30°÷ 39°)
Medium Flood

MW (40°÷ 49°)
Medium Wide Flood

WF (50°÷ 70°)
Wide Flood


Vertical Elliptical



OM (30°÷39°)x(<20°)
Elliptic M. Flood


OH (40°÷49°)x(<20°)
Elliptic M.W. Flood

1H (40°÷49°)x(20°÷40°)
Elliptic M.W. Flood

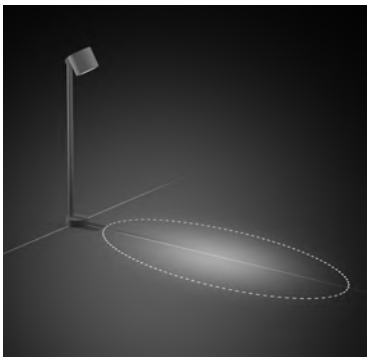

Distribution of the Elliptical optic:
Vertical

Horizontal Elliptical




1S (10°÷19°)x(20°÷40°)
Elliptic Spot

1M (30°÷39°)x(20°÷40°)
Elliptic M. Flood

EF (20°÷29°)x(41°÷60°)
Elliptic Flood

EM (30°÷39°)x(41°÷60°)
Elliptic M. Flood

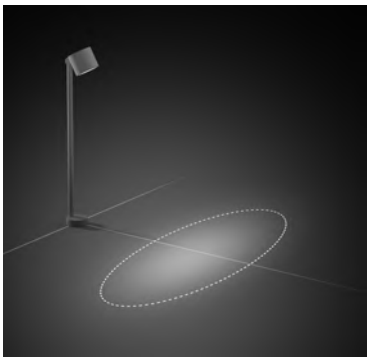

Distribution of the Elliptical optic:
Horizontal

COLOR TEMPERATURE




2200K | 2700K | 3000K | 4000K | RGBW | Dynamic White 2200K-5000K
Non standard color temperature

FINISHES




Text White R9003 | Text brilliant grey R9006 | Text Black R9005 | Dark Brown | Text Mattefield Green R6031

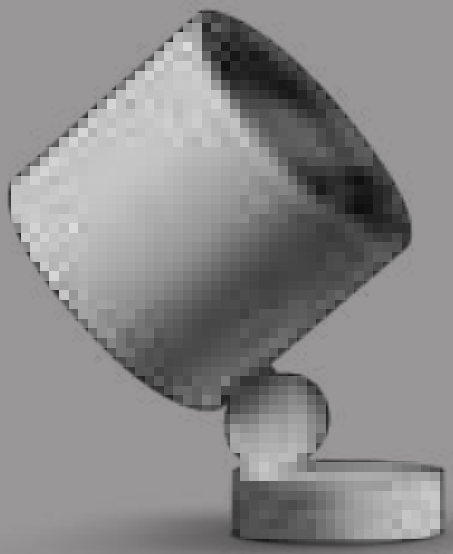


Text brilliant grey



Dark Brown

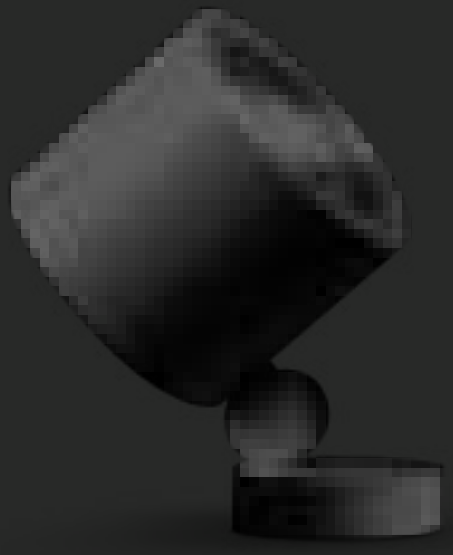

Text black

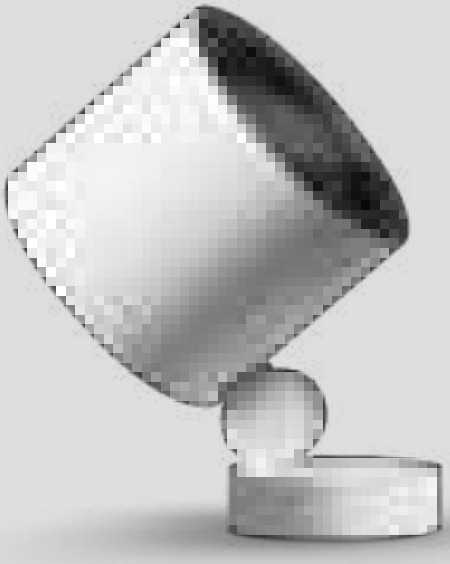

Text white





Text mattefield green

INFINITE MOVEMENTS FOR 360° LIGHT


The joint of Periskop Round is engineered to ensure maximum freedom in the orientation of the head and optical assembly. Horizontal rotation and wide vertical tilt allow the light beam to be directed in any position, even the most extreme ones. Each movement is optimized for smooth and stable adjustment, ensuring precise and long-lasting positioning over time. This flexibility enables millimetre-accurate calibration of the light, delivering illumination exactly where it is needed in every application.


Base Adjustment

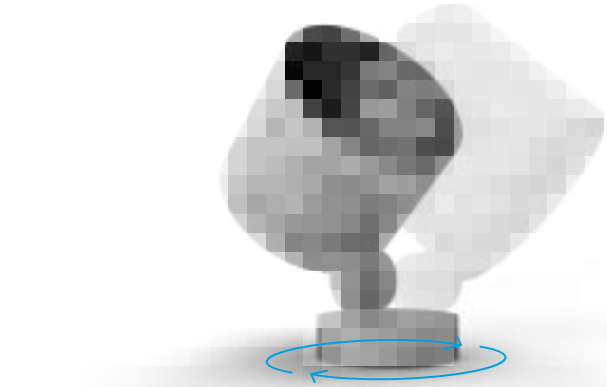





Double Joint Rotation

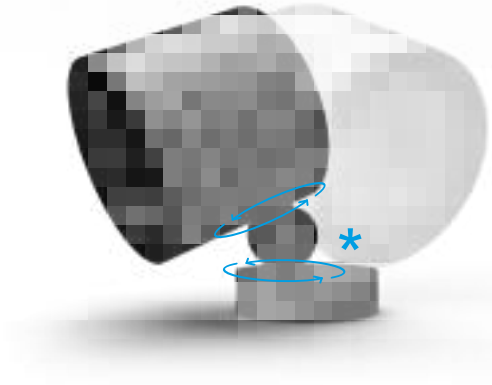

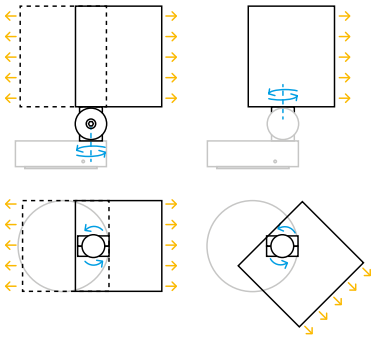

Tilting

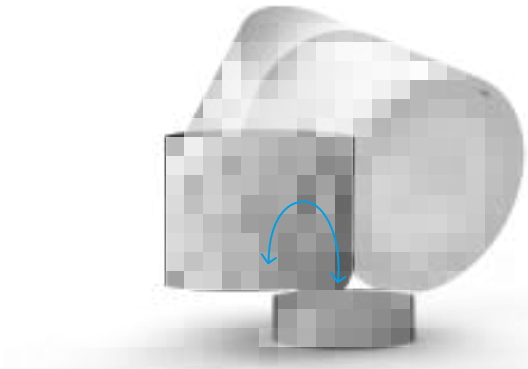

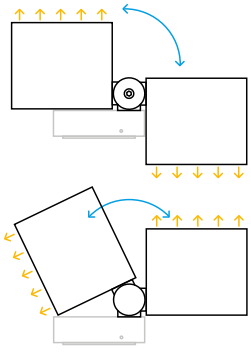


* The Periskop Round version with an 80 mm diameter features a single rotation





A COMPLETE RANGE OF ACCESSORIES

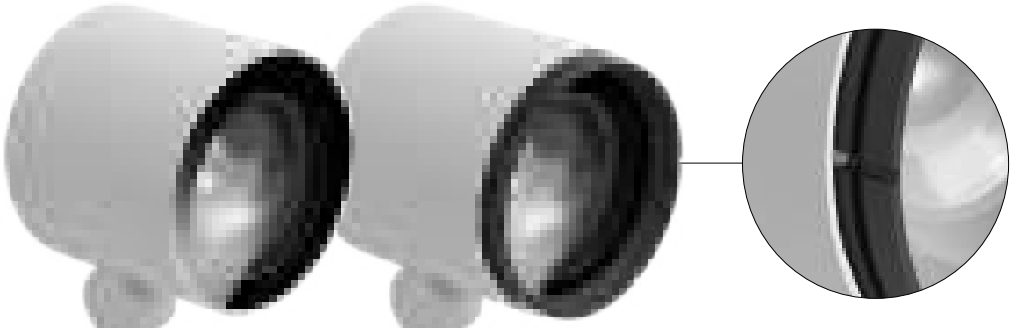

Front part in
Standard (S)
or **Modular (M)**
configuration.

Front part in **Standard + Comfort (SC)** or **Modular + Comfort (MC)** configuration.

Nota: Only SC and MC versions with a black front ring can be equipped with anti-glare accessories: cylindrical snoot and 45° cylindrical snoot.


Periskop Round
Comfort version (SC/MC)
With fixing ring for
anti-glare accessories

Cylindrical snoot
45° Cylindrical snoot
Mounted on the
luminaire front ring





Cylindrical snoot
White - Grey - Black
Dark Brown - Green




45° Cylindrical snoot
White - Grey - Black
Dark Brown - Green



Tree belt
(suitable for
Periskop
Round_R)



Peg
(suitable for
Periskop
Round_R)

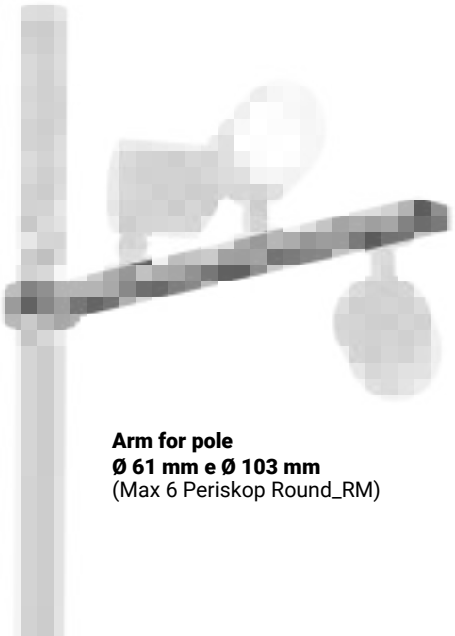


Arm for pole
Ø 61 mm e Ø 103 mm
(Max 6 Periskop Round_RM)



TOTAL CONTROL AND DEFINITION


The Periskop Round collection offers a wide range of optics, including high-performance solutions such as Hyper Spot and Ultra Spot. These optics are designed to deliver a precise and uniform light projection, ensuring maximum control and consistently defined results. Ideal for long-distance projections or for highlighting architectural and landscape details, they enable the creation of accurate lighting effects and visually impactful scenes. Their versatility and precision make them perfect for complex projects, enhancing outdoor environments with light carefully engineered down to the finest detail.

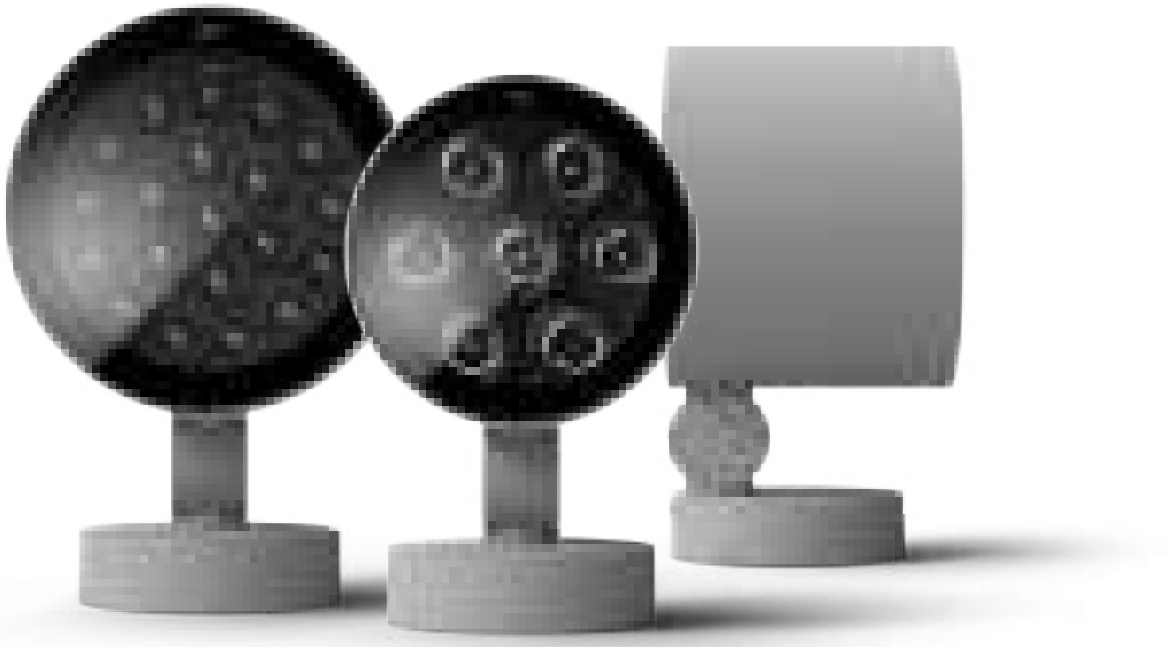


PRECISION OPTICS FOR EVERY DETAIL



Periskop80_R | powerLED






For Comfort versions (SC), anti-glare accessory not included


IK07 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 2 W DC - 2,5 W AC				
C01138 (S)	**WH**	**A**	145 - 109	**HS** (3°)
C01412 (SC)	**BB**	**M**	196 - 148	
	GG	**W**	210 - 159	
	DB	**N**	223 - 169	
	GR			
DALI				
220-240 V AC - 1,5 W DC - 2,5 W AC				
C01648 (S)	**WH**	**A**	111 - 83	**HS** (3°)
C01660 (SC)	**BB**	**M**	150 - 113	
	GG	**W**	160 - 121	
	DB	**N**	171 - 129	
	GR			

Accessories: (pag 41)

Periskop80_R | powerLED






For Comfort versions (SC), anti-glare accessory not included


IK07 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 8 W DC - 9 W AC				
C01140 (S)	**WH**	**A**	580 - 377	**US** (5°)
C01414 (SC)	**BB**	**M**	784 - 510	
	GG	**W**	840 - 546	
	DB	**N**	892 - 580	
	GR			
DALI				
220-240 V AC - 6 W DC - 8 W AC				
C01649 (S)	**WH**	**A**	444 - 289	**US** (5°)
C01661 (SC)	**BB**	**M**	600 - 390	
	GG	**W**	640 - 416	
	DB	**N**	684 - 445	
	GR			

Accessories: (pag 41)

Periskop80_R | arrayLED





For Comfort versions (SC), anti-glare accessory not included

IK07 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 9 W DC - 11 W AC				
C01142 (S)	**WH**	**A**	1011 - 792	**SP** (14°)
C01416 (SC)	**BB**	**M**	1265 - 991	**ML** (33°)
	GG	**W**	1320 - 1034	**MW** (48°)
DALI	**DB**	**N**	1354 - 1061	**1S** (15°x 37°)
C01650 (S)	**GR**			**1M** (30°x 41°)
C01662 (SC)				**OM** (37°x 15°)
				1H (41°x 30°)
HONEYCOMB				
220-240 V AC - 9 W DC - 11 W AC				
C01144 (S) HC	**WH**	**A**	1011 - 572	**SP** (14°)
C01418 (SC) HC	**BB**	**M**	1265 - 716	**FL** (33°)
	GG	**W**	1320 - 747	**MW** (48°)
DALI	**DB**	**N**	1354 - 766	
C01651 (S) HC	**GR**			
C01663 (SC) HC				

Accessories: (pag 41)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003
BB Text black R9005
GG Text brilliant grey R9006
DB Dark Brown
GR Text mattefield green R6031


Cct


A 2200
M 2700
W 3000
N 4000

Accessories

HC Honeycomb

Periskop80_RM | Modular | powerLED






For Comfort versions (MC), anti-glare accessory not included


3,5m IK07 IP66 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 2 W DC - 2,5 W AC				
C01147 (M)	**WH**	**A**	145 - 109	**HS** (3°)
C01421 (MC)	**BB**	**M**	196 - 148	
	GG	**W**	210 - 159	
	DB	**N**	223 - 169	
	GR			
DALI				
220-240 V AC - 1,5 W DC - 2,5 W AC				
C01652 (M)	**WH**	**A**	111 - 83	**HS** (3°)
C01664 (MC)	**BB**	**M**	150 - 113	
	GG	**W**	160 - 121	
	DB	**N**	171 - 129	
	GR			

Accessories: (pag 41) / Poles: (pag 42)

Periskop80_RM | Modular | powerLED






For Comfort versions (MC), anti-glare accessory not included


3,5m IK07 IP66 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 8 W DC - 9 W AC				
C01149 (M)	**WH**	**A**	580 - 377	**US** (5°)
C01423 (MC)	**BB**	**M**	784 - 510	
	GG	**W**	840 - 546	
	DB	**N**	892 - 580	
	GR			
DALI				
220-240 V AC - 6 W DC - 8 W AC				
C01653 (M)	**WH**	**A**	444 - 289	**US** (5°)
C01665 (MC)	**BB**	**M**	600 - 390	
	GG	**W**	640 - 416	
	DB	**N**	684 - 445	
	GR			

Accessories: (pag 41) / Poles: (pag 42)

Periskop80_RM | Modular | arrayLED





For Comfort versions (MC), anti-glare accessory not included

3,5m IK07 IP66 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 9 W DC - 11 W AC				
C01151 (M)	**WH**	**A**	1011 - 792	**SP** (14°)
C01425 (MC)	**BB**	**M**	1265 - 991	**ML** (33°)
	GG	**W**	1320 - 1034	**MW** (48°)
DALI	**DB**	**N**	1354 - 1061	**1S** (15°x 37°)
C01654 (M)	**GR**			**1M** (30°x 41°)
C01666 (MC)				**OM** (37°x 15°)
				1H (41°x 30°)
HONEYCOMB				
220-240 V AC - 9 W DC - 11 W AC				
C01153 (M) HC	**WH**	**A**	1011 - 572	**SP** (14°)
C01427 (MC) HC	**BB**	**M**	1265 - 716	**FL** (33°)
	GG	**W**	1320 - 747	**MW** (48°)
DALI	**DB**	**N**	1354 - 766	
C01655 (M) HC	**GR**			
C01667 (MC) HC				

Accessories: (pag 41) / Poles: (pag 42)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003
BB Text black R9005
GG Text brilliant grey R9006
DB Dark Brown
GR Text mattefield green R6031


Cct


A 2200
M 2700
W 3000
N 4000

Accessories

HC Honeycomb

Periskop80_R RGBW | arrayLED






For Comfort versions (SC), anti-glare accessory not included


IK07 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
630 mA - 8 W DC				
C01145 (S)	**WH**	**V**	RGBW (3000 K)	**NS** (9°)
C01419 (SC)	**BB**	**Q**	RGBW (4000 K)	**SP** (15°)
	GG			**MW** (48°)
	DB			
	GR			

Accessories: (pag 41)
Electronics: **CF** (pag 40)

Periskop80_RM RGBW | Modular | arrayLED





For Comfort versions (MC), anti-glare accessory not included

IK07 IP66 NEW
3,5m


	Fin	Cct	lm S - lm D	Opt
630 mA - 8 W DC				
C01154 (M)	**WH**	**V**	RGBW (3000 K)	**NS** (9°)
C01428 (MC)	**BB**	**Q**	RGBW (4000 K)	**SP** (15°)
	GG			**MW** (48°)
	DB			
	GR			


Accessories: (pag 41) / Poles: (pag 42)
Electronics: **CF** (pag 40)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.



Periskop115_R | powerLED






For Comfort versions (SC), anti-glare accessory not included


IK09 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 6,3 W DC - 8,5 W AC				
C01173 (S)	**WH**	**A**	435 - 257	**HS** (3°)
C01438 (SC)	**BB**	**M**	588 - 348	
	GG	**W**	630 - 373	
DALI	**DB**	**N**	669 - 396	
C01174 (S)	**GR**			
C01439 (SC)				

Accessories: (pag 41)

Periskop115_R | powerLED






For Comfort versions (SC), anti-glare accessory not included


IK09 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 19 W DC - 21 W AC				
C01175 (S)	**WH**	**A**	1305 - 595	**US** (5°)
C01440 (SC)	**BB**	**M**	1764 - 804	
	GG	**W**	1890 - 862	
DALI	**DB**	**N**	2007 - 915	
C01176 (S)	**GR**			
C01441 (SC)				

Accessories: (pag 41)

Periskop115_R | arrayLED





For Comfort versions (SC), anti-glare accessory not included

IK09 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 18 W DC - 20 W AC				
C01177 (S)	**WH**	**A**	2246 - 1676	**SP** (14°)
C01442 (SC)	**BB**	**M**	2773 - 2070	**ML** (34°)
	GG	**W**	2889 - 2157	**WF** (52°)
	DB	**N**	2966 - 2215	**1S** (15°x 39°)
DALI	**GR**			**EM** (32°x 44°)
C01178 (S)				**OM** (39°x 15°)
C01443 (SC)				**1H** (44°x 32°)


HONEYCOMB

220-240 V AC - 18 W DC - 20 W AC				
C01179 (S) HC	**WH**	**A**	2246 - 1224	**SP** (13°)
C01444 (SC) HC	**BB**	**M**	2773 - 1512	**ML** (30°)
	GG	**W**	2889 - 1576	**MW** (42°)
	DB	**N**	2966 - 1618	
DALI	**GR**			
C01180 (S) HC				
C01445 (SC) HC				

Accessories: (pag 41)

Periskop115_R RGBW | arrayLED





For Comfort versions (SC), anti-glare accessory not included

III C.C. IK09 IP65 NEW RGBW

	Fin	Cct	lm S - lm D	Opt
500 mA - 18 W DC				
C01181 (S)	**WH**	**V**	RGBW (3000 K)	**FL** (20°÷ 29°)
C01446 (SC)	**BB**			**ML** (30°÷ 39°)
	GG			**WF** (50°÷ 70°)
	DB			
	GR			

Accessories: (pag 41)
Electronics: **CT** (pag 40)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003
BB Text black R9005
GG Text brilliant grey R9006
DB Dark Brown
GR Text mattefield green R6031


Cct


A 2200
M 2700
W 3000
N 4000
V RGBW (3000 K)

Accessories

HC Honeycomb

Periskop115_RM | Modular | powerLED






For Comfort versions (MC), anti-glare accessory not included


5m IK09 IP66 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 6,3 W DC - 8,5 W AC				
C01182 (M)	**WH**	**A**	435 - 257	**HS** (3°)
C01447 (MC)	**BB**	**M**	588 - 348	
	GG	**W**	630 - 373	
DALI	**DB**	**N**	669 - 396	
C01183 (M)	**GR**			
C01448 (MC)				

Accessories: (pag 41) / Poles: (pag 42)

Periskop115_RM | Modular | powerLED






For Comfort versions (MC), anti-glare accessory not included


5m IK09 IP66 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 19 W DC - 21 W AC				
C01184 (M)	**WH**	**A**	1305 - 595	**US** (5°)
C01449 (MC)	**BB**	**M**	1764 - 804	
	GG	**W**	1890 - 862	
DALI	**DB**	**N**	2007 - 915	
C01185 (M)	**GR**			
C01450 (MC)				

Accessories: (pag 41) / Poles: (pag 42)

Periskop115_RM | Modular | arrayLED






For Comfort versions (MC), anti-glare accessory not included


5m IK09 IP66 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 18 W DC - 20 W AC				
C01186 (M)	**WH**	**A**	2246 - 1676	**SP** (14°)
C01451 (MC)	**BB**	**M**	2773 - 2070	**ML** (34°)
	GG	**W**	2889 - 2157	**WF** (52°)
	DB	**N**	2966 - 2215	**1S** (15°x 39°)
DALI	**GR**			**EM** (32°x 44°)
C01187 (M)				**OM** (39°x 15°)
C01452 (MC)				**1H** (44°x 32°)
HONEYCOMB				
220-240 V AC - 18 W DC - 20 W AC				
C01188 (M) HC	**WH**	**A**	2246 - 1224	**SP** (13°)
C01453 (MC) HC	**BB**	**M**	2773 - 1512	**ML** (30°)
	GG	**W**	2889 - 1576	**MW** (42°)
	DB	**N**	2966 - 1618	
DALI	**GR**			
C01189 (M) HC				
C01454 (MC) HC				

Accessories: (pag 41) / Poles: (pag 42)

Periskop115_RM RGBW | Modular | arrayLED





For Comfort versions (MC), anti-glare accessory not included

5m C.C. IK09 IP66 NEW RGBW

	Fin	Cct	lm S - lm D	Opt
500 mA - 18 W DC				
C01190 (M)	**WH**	**V**	RGBW (3000 K)	**FL** (20°÷ 29°)
C01455 (MC)	**BB**			**ML** (30°÷ 39°)
	GG			**WF** (50°÷ 70°)
	DB			
	GR			

Accessories: (pag 41) / Poles: (pag 42)
Electronics: **CT** (pag 40)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003 **GG** Text brilliant grey R9006 **GR** Text mattefield green R6031
BB Text black R9005 **DB** Dark Brown

Cct


A 2200 **W** 3000 **V** RGBW (3000 K)
M 2700 **N** 4000

Accessories

HC Honeycomb

Periskop150_R | powerLED






For Comfort versions (SC), anti-glare accessory not included


IK09 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 15 W DC - 17 W AC				
C01209 (S)	**WH**	**A**	1015 - 547	**HS** (3°)
C01465 (SC)	**BB**	**M**	1372 - 739	
	GG	**W**	1470 - 792	
DALI	**DB**	**N**	1561 - 841	
C01210 (S)	**GR**			
C01466 (SC)				

Accessories: (pag 41)

Periskop150_R | powerLED






For Comfort versions (SC), anti-glare accessory not included


IK09 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 34 W DC - 37,5 W AC				
C01211 (S)	**WH**	**A**	2320 - 1092	**US** (5°)
C01467 (SC)	**BB**	**M**	3136 - 1476	
	GG	**W**	3360 - 1582	
DALI	**DB**	**N**	3568 - 1680	
C01212 (S)	**GR**			
C01468 (SC)				

Accessories: (pag 41)

Periskop150_R | arrayLED






For Comfort versions (SC), anti-glare accessory not included
DW Dynamic White 2200K-5000K - 18W (x channel) available on request


IK09 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 29 W DC - 31,5 W AC				
C01213 (S)	**WH**	**A**	3743 - 2832	**SP** (16°)
C01469 (SC)	**BB**	**M**	4242 - 3207	**ML** (34°)
	GG	**W**	4513 - 3412	**WF** (53°)
	DB	**N**	4535 - 3446	**1S** (16°x 40°)
DALI	**GR**			**EM** (31°x 43°)
C01214 (S)				**OH** (40°x 16°)
C01470 (SC)				**1H** (43°x 31°)
HONEYCOMB				
220-240 V AC - 29 W DC - 31,5 W AC				
C01215 (S) HC	**WH**	**A**	3743 - 2048	**SP** (16°)
C01471 (SC) HC	**BB**	**M**	4242 - 2320	**ML** (31°)
	GG	**W**	4513 - 2468	**MW** (44°)
	DB	**N**	4535 - 2493	
DALI	**GR**			
C01216 (S) HC				
C01472 (SC) HC				

Accessories: (pag 41)

Periskop150_R RGBW | arrayLED





For Comfort versions (SC), anti-glare accessory not included

III C.C. IK09 IP65 NEW RGBW

	Fin	Cct	lm S - lm D	Opt
300 mA - 38 W DC				
C01217 (S)	**WH**	**V**	RGBW (3000 K)	**FL** (10°÷ 19°)
C01473 (SC)	**BB**			**ML** (30°÷ 39)
	GG			**WF** (50°÷ 70°)
	DB			
	GR			

Accessories: (pag 41)
Electronics: **GD** (pag 40)


Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.


Finishes
WH Text white R9003 · GG Text brilliant grey R9006 · GR Text mattefield green R6031
BB Text black R9005 · DB Dark Brown

Cct
A 2200 · **W** 3000 · **V** RGBW (3000 K)
M 2700 · **N** 4000

Accessories
HC Honeycomb

Periskop150_RM | Modular | powerLED






For Comfort versions (MC), anti-glare accessory not included


IK09 IP66 NEW 5m

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 15 W DC - 17 W AC				
C01218 (M)	**WH**	**A**	1015 - 547	**HS** (3°)
C01474 (MC)	**BB**	**M**	1372 - 739	
	GG	**W**	1470 - 792	
DALI	**DB**	**N**	1561 - 841	
C01219 (M)				
C01475 (MC)				

Accessories: (pag 41) / Poles: (pag 42)

Periskop150_RM | Modular | powerLED






For Comfort versions (MC), anti-glare accessory not included


IK09 IP66 NEW 5m

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 34 W DC - 37,5 W AC				
C01220 (M)	**WH**	**A**	2320 - 1092	**US** (5°)
C01476 (MC)	**BB**	**M**	3136 - 1476	
	GG	**W**	3360 - 1582	
DALI	**DB**	**N**	3568 - 1680	
C01221 (M)				
C01477 (MC)				

Accessories: (pag 41) / Poles: (pag 42)

Periskop150_RM | Modular | arrayLED






For Comfort versions (MC), anti-glare accessory not included
DW Dynamic White 2200K-5000K - 18W (x channel) available on request


IK09 IP66 NEW 5m

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 29 W DC - 31,5 W AC				
C01222 (M)	**WH**	**A**	3743 - 2832	**SP** (16°)
C01478 (MC)	**BB**	**M**	4242 - 3207	**ML** (34°)
	GG	**W**	4513 - 3412	**WF** (53°)
	DB	**N**	4535 - 3446	**1S** (16°x 40°)
DALI				**EM** (31°x 43°)
C01223 (M)				**OH** (40°x 16°)
C01479 (MC)				**1H** (43°x 31°)
HONEYCOMB				
220-240 V AC - 29 W DC - 31,5 W AC				
C01224 (M) HC	**WH**	**A**	3743 - 2048	**SP** (16°)
C01480 (MC) HC	**BB**	**M**	4242 - 2320	**ML** (31°)
	GG	**W**	4513 - 2468	**MW** (44°)
	DB	**N**	4535 - 2493	
DALI				
C01225 (M) HC				
C01481 (MC) HC				

Accessories: (pag 41) / Poles: (pag 42)

Periskop150_RM RGBW | Modular | arrayLED





For Comfort versions (MC), anti-glare accessory not included

III C.C. IK09 IP66 NEW 5m RGBW

	Fin	Cct	lm S - lm D	Opt
300 mA - 38 W DC				
C01226 (M)	**WH**	**V**	RGBW (3000 K)	**FL** (10°÷ 19°)
C01482 (MC)	**BB**			**ML** (30°÷ 39)
	GG			**WF** (50°÷ 70°)
	DB			

Accessories: (pag 41) / Poles: (pag 42)
Electronics: **GD** (pag 40)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003
BB Text black R9005
GG Text brilliant grey R9006
DB Dark Brown


Cct


A 2200
M 2700
W 3000
N 4000
V RGBW (3000 K)

Accessories

HC Honeycomb

Periskop175_R | powerLED






For Comfort versions (SC), anti-glare accessory not included


IK08 IP65 NEW

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 42 W DC - 46 W AC				
C01227 (S)	**WH**	**A**	2900 - 1792	**US** (5 °)
C01483 (SC)	**BB**	**M**	3920 - 2422	
	GG	**W**	4200 - 2596	
DALI	**DB**	**N**	4460 - 2756	
C01228 (S)	**GR**			
C01484 (SC)				

Accessories: (pag 41)

Periskop175_R | arrayLED





For Comfort versions (SC), anti-glare accessory not included
DW Dynamic White 2200K-5000K - 25W (x channel) available on request

IK08 IP65 NEW


	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 45 W DC - 49 W AC				
C01229 (S)	**WH**	**A**	6452 - 5108	**FL** (23°)
C01485 (SC)	**BB**	**M**	7328 - 5810	**ML** (37°)
	GG	**W**	7642 - 6052	**WF** (55°)
	DB	**N**	7835 - 6203	**1H** (42°x 22°)
DALI	**GR**			**EF** (22°x 42°)
C01230 (S)				
C01486 (SC)				


HONEYCOMB

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 45 W DC - 49 W AC				
C01231 (S) HC	**WH**	**A**	6452 - 3753	**FL** (22°)
C01487 (SC) HC	**BB**	**M**	7328 - 4269	**ML** (33°)
	GG	**W**	7642 - 4447	**MW** (47°)
	DB	**N**	7835 - 4558	
DALI	**GR**			
C01232 (S) HC				
C01488 (SC) HC				

Accessories: (pag 41)

Periskop175_R RGBW | arrayLED





For Comfort versions (SC), anti-glare accessory not included


III C.C. IK08 IP65 NEW RGBW


	Fin	Cct	lm S - lm D	Opt
450 mA - 48 W DC				
C01233 (S)	**WH**	**V**	RGBW (3000 K)	**FL** (20°÷ 29°)
C01489 (SC)	**BB**			**ML** (30°÷ 39°)
	GG			**WF** (50°÷ 70°)
	DB			
	GR			

Accessories: (pag 41)
Electronics: **GC** (pag 40)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Periskop175_RM | Modular | powerLED






For Comfort versions (MC), anti-glare accessory not included


5m

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 42 W DC - 46 W AC				
C01234 (M)	**WH**	**A**	2900 - 1792	**US** (5 °)
C01490 (MC)	**BB**	**M**	3920 - 2422	
	GG	**W**	4200 - 2596	
DALI	**DB**	**N**	4460 - 2756	
C01235 (M)				
C01491 (MC)				

Accessories: (pag 41) / Poles: (pag 42)

Periskop175_RM | Modular | arrayLED





For Comfort versions (MC), anti-glare accessory not included
DW Dynamic White 2200K-5000K - 25W (x channel) available on request

5m


	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 45 W DC - 49 W AC				
C01236 (M)	**WH**	**A**	6452 - 5108	**FL** (23°)
C01492 (MC)	**BB**	**M**	7328 - 5810	**ML** (37°)
	GG	**W**	7642 - 6052	**WF** (55°)
	DB	**N**	7835 - 6203	**1H** (42°x 22°)
DALI				**EF** (22°x 42°)
C01237 (M)				
C01493 (MC)				


HONEYCOMB

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 45 W DC - 49 W AC				
C01238 (M) HC	**WH**	**A**	6452 - 3753	**FL** (22°)
C01494 (MC) HC	**BB**	**M**	7328 - 4269	**ML** (33°)
	GG	**W**	7642 - 4447	**MW** (47°)
	DB	**N**	7835 - 4558	
DALI				
C01239 (M) HC				
C01495 (MC) HC				

Accessories: (pag 41) / Poles: (pag 42)

Periskop175_RM RGBW | Modular | arrayLED





For Comfort versions (MC), anti-glare accessory not included

5m

	Fin	Cct	lm S - lm D	Opt
450 mA - 48 W DC				
C01240 (M)	**WH**	**V**	RGBW (3000 K)	**FL** (20°÷ 29°)
C01496 (MC)	**BB**			**ML** (30°÷ 39°)
	GG			**WF** (50°÷ 70°)
	DB			

Accessories: (pag 41) / Poles: (pag 42)
Electronics: **GC** (pag 40)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003
BB Text black R9005
GG Text brilliant grey R9006
DB Dark Brown

Cct

A 2200
M 2700
W 3000
N 4000
V RGBW (3000 K)


Accessories


HC Honeycomb





Periskop80_RBS | powerLED







For Comfort versions (SC), anti-glare accessory not included

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 2 W DC - 2,5 W AC				
C01156 (S)	**WH**	**A**	145 - 109	**HS** (3°)
C01430 (SC)	**BB**	**M**	196 - 148	
	GG	**W**	210 - 159	
	DB	**N**	223 - 169	
	GR			
DALI				
220-240 V AC - 1,5 W DC - 2,5 W AC				
C01656 (S)	**WH**	**A**	111 - 83	**HS** (3°)
C01668 (SC)	**BB**	**M**	150 - 113	
	GG	**W**	160 - 121	
	DB	**N**	171 - 129	
	GR			

Accessories: (pag 41)

Periskop80_RBS | powerLED







For Comfort versions (SC), anti-glare accessory not included

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 8 W DC - 9 W AC				
C01158 (S)	**WH**	**A**	580 - 377	**US** (5°)
C01432 (SC)	**BB**	**M**	784 - 510	
	GG	**W**	840 - 546	
	DB	**N**	892 - 580	
	GR			
DALI				
220-240 V AC - 6 W DC - 8 W AC				
C01657 (S)	**WH**	**A**	444 - 289	**US** (5°)
C01669 (SC)	**BB**	**M**	600 - 390	
	GG	**W**	640 - 416	
	DB	**N**	684 - 445	
	GR			

Accessories: (pag 41)

Periskop80_RBS | arrayLED





For Comfort versions (SC), anti-glare accessory not included

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 9 W DC - 11 W AC				
C01160 (S)	**WH**	**A**	1011 - 792	**SP** (14°)
C01434 (SC)	**BB**	**M**	1265 - 991	**ML** (33°)
	GG	**W**	1320 - 1034	**MW** (48°)
DALI	**DB**	**N**	1354 - 1061	**1S** (15°x 37°)
C01658 (S)	**GR**			**1M** (30°x 41°)
C01670 (SC)				**OM** (37°x 15°)
				1H (41°x 30°)
HONEYCOMB				
220-240 V AC - 9 W DC - 11 W AC				
C01162 (S) HC	**WH**	**A**	1011 - 572	**SP** (14°)
C01436 (SC) HC	**BB**	**M**	1265 - 716	**FL** (33°)
	GG	**W**	1320 - 747	**MW** (48°)
DALI	**DB**	**N**	1354 - 766	
C01659 (S) HC	**GR**			
C01671 (SC) HC				

Accessories: (pag 41)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003
BB Text black R9005
GG Text brilliant grey R9006
DB Dark Brown
GR Text mattefield green R6031


Cct


A 2200
M 2700
W 3000
N 4000

Accessories

HC Honeycomb

Periskop80_RBS RGBW | arrayLED





For Comfort versions (SC), anti-glare accessory not included

	Fin	Cct	lm S - lm D	Opt
630 mA - 8 W DC				
C01163 (S)	**WH**	**V**	RGBW (3000 K)	**NS** (9°)
C01437 (SC)	**BB**	**Q**	RGBW (4000 K)	**SP** (15°)
	GG			**MW** (48°)
	DB			
	GR			

Accessories: (pag 41)
Electronics: **CF** (pag 40)



Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003 **GG** Text brilliant grey R9006 **GR** Text mattefield green R6031
BB Text black R9005 **DB** Dark Brown


Cct


A 2200 **W** 3000 **V** RGBW (3000 K)
M 2700 **N** 4000 **Q** RGBW (4000 K)

Accessories

HC Honeycomb

Periskop115_RBS | powerLED







For Comfort versions (SC), anti-glare accessory not included

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 6,3 W DC - 8,5 W AC				
C01191 (S)	**WH**	**A**	435 - 257	**HS** (3°)
C01456 (SC)	**BB**	**M**	588 - 348	
	GG	**W**	630 - 373	
DALI	**DB**	**N**	669 - 396	
C01192 (S)	**GR**			
C01457 (SC)				

Accessories: (pag 41)

Periskop115_RBS | powerLED







For Comfort versions (SC), anti-glare accessory not included

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 19 W DC - 21 W AC				
C01193 (S)	**WH**	**A**	1305 - 595	**US** (5°)
C01458 (SC)	**BB**	**M**	1764 - 804	
	GG	**W**	1890 - 862	
DALI	**DB**	**N**	2007 - 915	
C01194 (S)	**GR**			
C01459 (SC)				

Accessories: (pag 41)

Periskop115_RBS | arrayLED





For Comfort versions (SC), anti-glare accessory not included

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 18 W DC - 20 W AC				
C01195 (S)	**WH**	**A**	2246 - 1676	**SP** (14°)
C01460 (SC)	**BB**	**M**	2773 - 2070	**ML** (34°)
	GG	**W**	2889 - 2157	**WF** (52°)
	DB	**N**	2966 - 2215	**1S** (15°x 39°)
DALI	**GR**			**EM** (32°x 44°)
C01196 (S)				**OM** (39°x 15°)
C01461 (SC)				**1H** (44°x 32°)

HONEYCOMB

	Fin	Cct	lm S - lm D	Opt
220-240 V AC - 18 W DC - 20 W AC				
C01197 (S) HC	**WH**	**A**	2246 - 1224	**SP** (13°)
C01462 (SC) HC	**BB**	**M**	2773 - 1512	**ML** (30°)
	GG	**W**	2889 - 1576	**MW** (42°)
	DB	**N**	2966 - 1618	
DALI	**GR**			
C01198 (S) HC				
C01463 (SC) HC				

Accessories: (pag 41)

Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003
BB Text black R9005
GG Text brilliant grey R9006
DB Dark Brown
GR Text mattefield green R6031


Cct


A 2200
M 2700
W 3000
N 4000

Accessories

HC Honeycomb

Periskop115_RBS RGBW | arrayLED





For Comfort versions (SC), anti-glare accessory not included

	Fin	Cct	Im S - Im D	Opt
500 mA - 18 W DC				
C01199 (S) **C01464** (SC)	**WH** **BB** **GG** **DB** **GR**	**V**	RGBW (3000 K)	**FL** (20°÷ 29°) **ML** (30°÷ 39) **WF** (50°÷ 70°)

Accessories: (pag 41)
Electronics: **CT** (pag 40)



Important: It should be noted that the Standard versions are not designed for the subsequent installation of anti-glare accessories.
For the Comfort versions, it is recommended to select and include the corresponding anti-glare accessory in the order.

Finishes

WH Text white R9003 **GG** Text brilliant grey R9006 **GR** Text mattefield green R6031
BB Text black R9005 **DB** Dark Brown

Cct

A 2200 **W** 3000 **V** RGBW (3000 K)
M 2700 **N** 4000

Accessories

HC Honeycomb

Electronics

CT

C-E700003+C-W600001	C-E500012	DMX	Driver CV	Switching
Dimmer RF 2 - 4 art. 175 x 45 x h 27 52	Dimmer DMX 2 - 4 art. 107 x 96 x h 39	Controllers Pag. 963	CV 48V Pag. 950-951	CV 48V Pag. 945-946

GC

C-E700003+C-W600001	C-E500014	DMX	Driver CV	Switching
Dimmer RF 1 art. 175 x 45 x h 27 52	Dimmer DMX 1 art. 107 x 96 x h 39	Controllers Pag. 963	CV 48V Pag. 951	CV 48V Pag. 945-946

GD

C-E700003+C-W600001	C-E500014	DMX	Driver CV	Switching
Dimmer RF 1 art. 175 x 45 x h 27 52	Dimmer DMX 1 art. 107 x 96 x h 39	Controllers Pag. 963	CV 48V Pag. 951	CV 48V Pag. 945-946

CF


C-E700003+C-W600001	C-E500011	DMX	Driver CV	Switching
Dimmer RF 6 - 12 art. 175 x 45 x h 27 52	Dimmer DMX 6 - 12 art. 107 x 96 x h 39	Controllers Pag. 963	CV 48V Pag. 950-951	CV 48V Pag. 945-946

NOTE: For technical specifications regarding power supply and control, please refer to the current Maestro professional catalog.



Accessories


Cylindrical snoot | Periskop80_R / _RM / _RBS Comfort



WH **C-U300053**
BB **C-U300054**
GG **C-U300055**
DB **C-U300056**
GR **C-U300057**

Anti-glare screen compatible only with Comfort versions **(SC) + (MC)**


Cylindrical snoot | Periskop115_R / _RM / _RBS Comfort



WH **C-U300063**
BB **C-U300064**
GG **C-U300065**
DB **C-U300066**
GR **C-U300067**

Anti-glare screen compatible only with Comfort versions **(C) + (MC)**


Cylindrical snoot | Periskop150_R / _RM / _RBS Comfort



WH **C-U300073**
BB **C-U300074**
GG **C-U300075**
DB **C-U300076**
GR **C-U300077**

Anti-glare screen compatible only with Comfort versions **(C) + (MC)**


Cylindrical snoot | Periskop175_R / _RM / _RBS Comfort



WH **C-U300083**
BB **C-U300084**
GG **C-U300085**
DB **C-U300086**
GR **C-U300087**

Anti-glare screen compatible only with Comfort versions **(C) + (MC)**

Pole arm | Ø 61 mm



SE **C-F700001** Pole arm + bracket Ø 61 mm
suitable for: Periskop RM

Plastic peg




PLC **C-F500006** Picchetto L204 mm
suitable for: Periskop80_R / Peeriskop80_RBS

Plastic peg




PLC **C-F500007** Picchetto L301 mm
suitable for: Periskop115_R / Periskop115_RBS
Periskop150_R / Periskop175_R

Tree trap



SE **C-F800004** Cintura per albero
suitable for: Periskop80_R - Periskop115_R
Periskop150_R - Periskop175_R

Snoot in matching 45° | Periskop80_R / _RM / _RBS Comfort



WH **C-U300058**
BB **C-U300059**
GG **C-U300060**
DB **C-U300061**
GR **C-U300062**

Anti-glare screen compatible only with Comfort versions **(C) + (MC)**


Snoot in matching 45° | Periskop115_R / _RM / _RBS Comfort



WH **C-U300068**
BB **C-U300069**
GG **C-U300070**
DB **C-U300071**
GR **C-U300072**

Anti-glare screen compatible only with Comfort versions **(C) + (MC)**


Snoot in matching 45° | Periskop150_R / _RM / _RBS Comfort



WH **C-U300078**
BB **C-U300079**
GG **C-U300080**
DB **C-U300081**
GR **C-U300082**

Anti-glare screen compatible only with Comfort versions **(C) + (MC)**


Snoot in matching 45° | Periskop175_R / _RM / _RBS Comfort




WH **C-U300088**
BB **C-U300089**
GG **C-U300090**
DB **C-U300091**
GR **C-U300092**

Anti-glare screen compatible only with Comfort versions **(C) + (MC)**

Pole arm | Ø 103 mm



SE **C-F700002** Pole arm + bracket Ø 103 mm
suitable for: Periskop RM

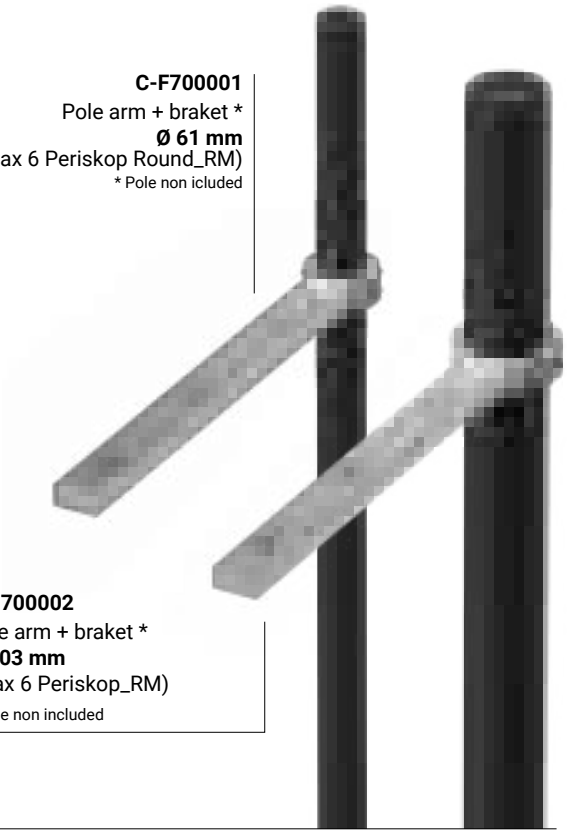

Finishes

WH Text white R9003
BB Text black R9005
GG Text brilliant grey R9006
DB Dark Brown
GR Text mattefield green R6031
SE Stainless Steel

Poles

TECHNICAL CHARACTERISTICS

The calculations with the relative design loads are carried out in accordance with:

- Presidential Decree 07/01/1956 No. 164 “Regulations for the prevention of injuries in the workplace.”
- Law No. 1086 of 05/11/71: “Regulations on works by reinforced, normal and prestressed concrete and in metallic structure.”
- CNR - UNI 10011/88: “Steel construction: instructions for calculation, execution, commissioning and maintenance.”
- CNR10022/84: “Cold formed sections. Instructions for use in building.”
- “UNI - ENV ” 1993-1-1(2004 - Eurocode 3, Design of concrete structures Part 1- 1: General regulations-General rules and rules for buildings.
- Ministerial Decree 14/01/08 Technical standards for construction.
- Ministerial Circular No. 617 of 02/02/09 “Instructions for the application of the Technical Standards for construction pursuant to Ministerial Decree 14 January 2008.
- “UNI-ENV 1991-2-4 (1997), Eurocode 1, Basis of design and actions on structures” For the entire sector of poles 20 m tall or shorter (straight poles) and equal to or shorter than 18 m (poles with arm), in the European Union, the harmonized UNI-EN standards are applied correlated with the “European Directive Council of 21 December 1988 relative to the reconciliation of the legislative, Regulatory and administrative provisions of the member States concerning construction products EEC 89/106.”
- The lamp towers are constructed in observance of DPR 547 “Standards for prevention of accidents” and DPR 459 “Regulation for the implementation of the 89/392/EEC, 91/368/EEC, 93/44/EEC and 93/68/ directives.
- EEC concerning the reconciliation of legislation by the member States relative to machines.

	 MATERIAL	 UNI EN 40/2 DIMENSIONAL TOLERANCES	 PROTECTION
CYLINDRICAL POLES	**Steel:** S235 JRH - UNI EN 10219 (Fe 360B) **R:** 360 - 490 N/mm² **R and H:** 235 N/mm² **A:** 20 %	**External diameter:** ± 1 % **Thickness:** ± 10 % **Straightness:** ± 0.3 % of the total length Length: ± 0.5 %	Hot galvanising in accordance with UNI EN ISO 1461
CONICAL POLES, CURVED BY SHEET METAL	**Steel:** S235 JRH - UNI EN 10219 (Fe 360B) **R:** 360 - 490 N/mm² **R and H:** 235 N/mm² **A:** 20 %	**External diameter:** ± 1 % **Shape:** ± 3 % from the diameter **Thickness:** ± 10 % **Straightness:** ± 0.3 % of the total length **Length:** ± 0.5 %	Hot galvanising in accordance with UNI EN ISO 1461
CONICAL POLES, HOT ROLLED	**Steel:** S275 JOH - UNI EN 10219 (Fe 340) (S235 JOH - UNI EN 10219 on request) **R:** 410 - 560 N/mm² (360 - 490 N/mm² on request) **R and H:** 275 N/mm² (360 - 490 N/mm² on request) **A:** 20 %	**External diameter:** ± 3 % **Thickness:** ± 0.3 % **Straightness:** ± 0.3 % of the total length **Length:** ± 50 mm	Hot galvanising in accordance with UNI EN ISO 1461

R = unit tensile strength load
R and H = unit yield load
A = elongation

Specifications

- Slot for terminal block.
- Incoming cables slot.
- Earth connection.
- Hot galvanising by immersion in melted zinc bath.
- Processing carried out in accordance with UNI EN 40/4 standards.
- Powder coating.
- Hydrocarbonising of the external buried part.
- Anti-corrosion sleeve to the section of coupling in membrane.

On request:

- Base plate with anchoring holes.
- Reinforcing sleeve in welded steel.
- Coating matched to Periskop Round



*****


The Finish Flex program allows, upon request, the customization of fixtures or accessories with non-standard finishes selected from the Linea Light Group finishes catalogue. A solution that adapts to the project, ensuring the highest level of aesthetic consistency.

*** Finish Flex**




Standard

Galvanized Steel (ZN)
The poles are made entirely in galvanised steel.

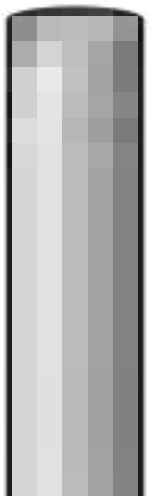

Conical poles in galvanised steel or painted









		L mm	Hft mm	I mm	D mm	d mm	Kg	Slot mm
ZN	**98150**	3500	3000	500	95	60	21	38x132
ZN	**98151**	4500	4000	500	105	60	28	38x132
ZN	**98152**	5500	5000	500	115	60	37	38x132
ZN	**98153**	6800	6000	800	128	60	48	45x186
ZN	**98154**	7800	7000	800	138	60	58	45x186
ZN	**98155**	8800	8000	800	148	60	81	45x186
ZN	**98156**	9800	9000	800	158	60	81	45x186
ZN	**98157**	10800	10000	800	168	60	93	45x186
ZN	**98158**	6800	6000	800	128	60	63	45x186
ZN	**98159**	7800	7000	800	138	60	77	45x186
ZN	**98160**	8800	8000	800	148	60	91	45x186
ZN	**98161**	9800	9000	800	158	60	107	45x186
ZN	**98162**	10800	10000	800	168	60	123	45x186

Cylindrical poles in galvanised steel








		L mm	Hft mm	I mm	D mm	d mm	Kg	Slot mm
ZN	**98163**	5500	5000	500	102	102	44	38x132
ZN	**98164**	7000	6000	1000	102	102	64	45x186

Cover for pole hand hole.






		L mm	T mm	Kg
AT	**98192**	132	38	0,09
AT	**98194**	186	45	0,15
ZN	**On req**	132	38	0,09
ZN	**On req**	186	45	0,15

Terminal block for hand hole (2 poli - 10 A)





		L mm	T mm
PVC	**98193**	132	38
PVC	**98195**	186	45

Finishes

ZN Galvanised Steel

Addresses

Linea Light HQ Italy
Via Europa, 14
31028 Vazzola TV
Italy

+39 0438 444826
info@linealight.com

Linea Light HUB Milano
Via Giovanni Boccaccio, 15/A
20123 Milano MI
Italy

+39 02 36750915
milano@linealight.com

Linea Light Nord-Est
Via Medoaco 4
c/o Hope Center
35135 Padova PD
Italy
+39 049 7969440
nordest@linealight.com

Linea Light Roma
Via La Spezia, 34
00182 Roma
Italy

+39 06 68589134
roma@linealight.com

Linea Light UK
Suite205 The business design center
52 Upper Street Islington
N10QH London
United Kingdom
+44 0203 6371983
info@linealight.co.uk

Linea Light France
Zone Artisanale
12 A, rue des Artisans
68700 Cernay
France

+33 389 75 52 23
info@linealight.fr

Linea Light Deutschland
Aktienstraße 214
45473 Mülheim an der Ruhr
Germany

+49 208 299979-0
service@linealight.de

Linea Light Greece
538 Vouliagmenis Ave.
17456 Alimos Athens
Greece

+30 210 9940559
g.virinis@linealight.com

Linea Light Spain
C/ Longares, 48
28022 Madrid
Spain

+34 912534773
gestion@linealight.com

Linea Light USA - Inter Lux
3741 Commerce Drive - Suites 306-308
MD21227 Baltimore
USA

+1 410 381 1497
answers@inter-lux.com

Linea Light GCC
P.O. Box 125902
Jumeirah Lake Towers JBC2
35th Floor Office 04
Dubai UAE
+971 4 4218275
info@linealight.ae


Linea Light Asia - Pacific
No. 7, Nanyi Huayuan Road,
Industry Avenue, 528478 Xiaolan Town,
Zhongshan City, Guangdong Province
China
+86 760 87618355
info@linealight.com.cn

Linea Light Singapore
21 Kaki Bukit Place, 5th Fl.
416199 Singapore
Singapore

+65 6908 5758
info.sg@linealight.com

linealight.com





LIGHT UP NEW IDEAS!

linealight.com